


XN-2-2408-EA1

- Single/Double Pole; Single/Double Throw
- Ratings:  
16A 125VAC; 10A 250VAC, UL  
8A 250VAC; TUV, VDE, CQC
- Features:  
Knob, Terminal Options see selections guide

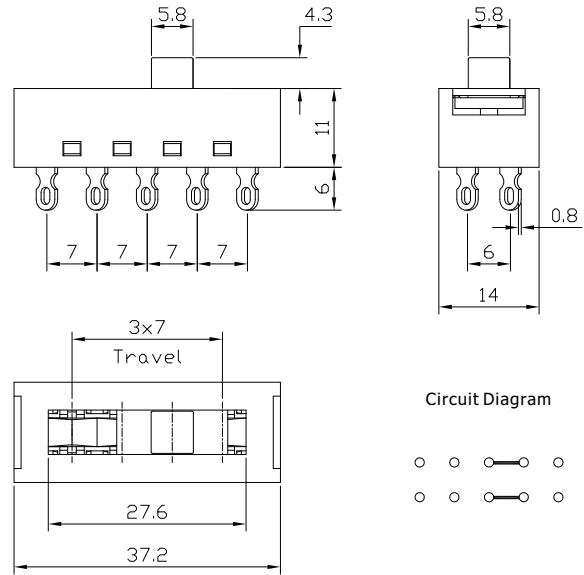


**XN-2-2408-XX1**

Double Pole	2	4	0	8	-	X	X	1
4 Position								
Current at 250VAC								

Double Pole: 2  
 4 Position: 4  
 Current at 250VAC: 08  
 Housing Code: XX  
 Terminal Code: X  
 Actuator Code: 1

Actuator Options

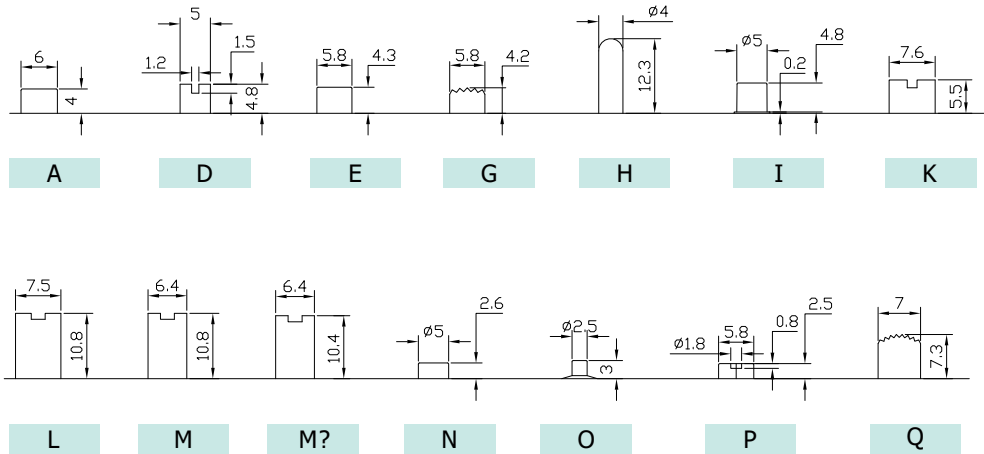

Terminal Options

